




FTTH Indoor Cable

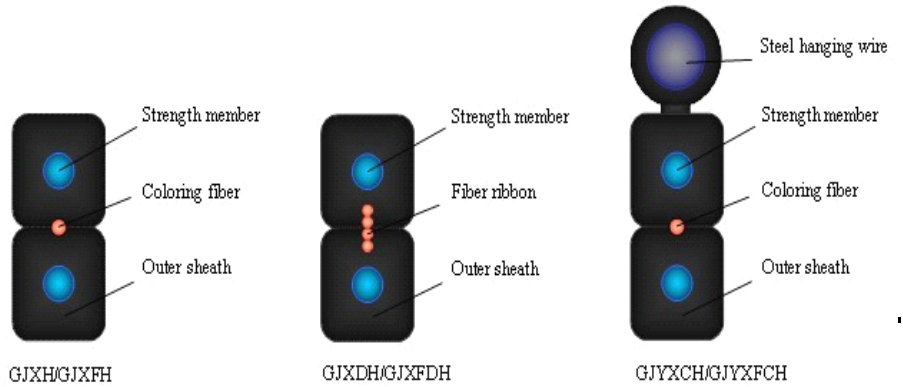

Product features

- ⊙ Using special low-bend-sensitivity fiber B6 (G.657), provides greater bandwidth and excellent communication transmission property
- ⊙ Two parallel strength members (Metal or FRP) ensure the fiber are better protected
- ⊙ Low smoke zero halogen flame-retardant jacket leads to more safety and environmental protection
- ⊙ Simple structure, light weight and practicability
- ⊙ Novel flute design, easily strip and splice, simplify the installation and maintenance
- ⊙ Additional metal hanging wire can enhance the tensile strength

Mechanical Characteristics

Cable type	No. of Fiber Core	Tensile strength(N)		Compressive resistance(N/100mm)		Bending radius(mm)	
		Long Term	Short Term	Long Term	Short Term	Dynamic	Static
GJXH/ GJXDH	1-8/4-12	100	200	1000	2200	30	15
GJXFH/ GJXFDH	1-8/4-12	60	100	500	1000	30	15
GJYXCH/ GJYXFCH GJYXDCH/ GJYXFDCH	1-4	300	600	1000	2200	30	15

Transmission Characteristics

Wavelength (nm)	1310	1550
Attenuation (db/km)	≤ 0.4	≤ 0.3

Storage & Operating Temperature -20°C ~ +50°C